

JVC



WIRELESS HEADPHONES
سماعات الرأس اللاسلكية

HA-S50BT / HA-S40BT / HA-S30BT



Bluetooth®

INSTRUCTIONS
التعليمات



English

Thank you for purchasing this JVC product. Before you begin operating this unit, please read the operating instructions carefully to be sure you enjoy the best possible performance. If you have any questions, please consult your JVC dealer.

CAUTION

To reduce the risk of electrical shocks, fire, etc.

- Do not remove screws, cover or cabinet.
- Do not expose this appliance to rain or moisture.
- Do not disassemble or modify the unit.
- Do not allow flammable, water or metallic objects to enter the unit.

For your safety...

- In dryer air conditions such as in winter, you may feel some static shock when using the headphones.
- Should you start to feel ill while using the headphones, you should stop using them immediately.
- Be sure that your hair or any other objects do not get caught in the headband slider (adjuster) when adjusting the headband.

Avoid using the headphones...

- in places subject to excessive humidity or dust
- in places subject to extremely high (over 40 °C or 104 °F) or low (under 5 °C or 41 °F) temperatures

DO NOT leave the headphones...

- exposed to direct sunlight
- near a heater

To protect the headphones, DO NOT...

- allow them to get wet
- shake them or drop them against hard objects

Precautions for use

- Do not use any cables other than the ones provided.
- Do not use supplied charging cable for any other equipment.
- The ear pads will wear out earlier than the other parts even in normal use or in normal storage due to the material characteristics.
- For replacement of the ear pads, consult with the dealer where you purchased the headphones.

NOTE

If the System does not work correctly, charge the System to reset it.



To prevent possible hearing damage, do not listen at high volume levels for long periods.

Specifications

Power supply/General

Power supply	Internal rechargeable lithium battery
Frequency response	20 Hz - 000 20 Hz
Battery life	Approx. 17 hrs (Depends on usage conditions.)
Charging time	Approx. 3 hrs
Usage temperature range	5 °C (41 °F) to 40 °C (104 °F)
Mass	S50BT: 145 g (5.11oz), S40BT: 146 g (5.15oz), S30BT: 143 g (5.04oz) (including internal rechargeable battery)
Accessories	Charging cable

Designs and specifications are subject to change without notice.

BLUETOOTH

Standard	BLUETOOTH v3.0 Class 2	Max. communication distance	Approx. 10 m (33 ft)
Profiles	A2DP/AVRCP/HSP/HFP	Codecs	SBC
Frequency range	2.402 GHz - 2.480 GHz	Output power	4+ dBm (MAX), Power Class 2


EUT has the power settings by the software as follows;

RF: GFSK Power:33, EDR Power: 27


Software: AB1500G Family Configuration Tool 2.5.23.0

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by JVCKENWOOD Corporation (JVC) is under licence. Other trademarks and trade names are those of their respective owners.

PARTS (right side)

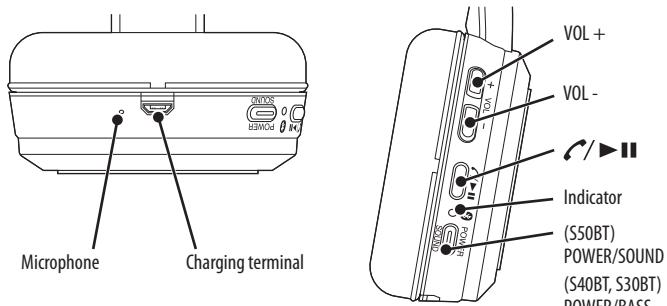


CHARGING

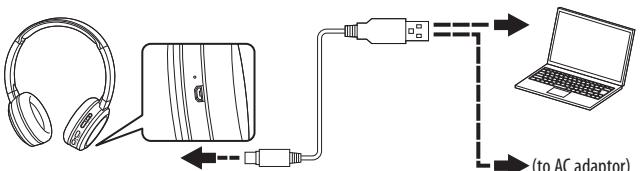

The indicator lights up in red, and charging starts. When charging is complete, the indicator goes out.

- When the remaining battery power is low, the indicator flashes red slowly and the alarm sounds every 4 minutes.
- Operation is not possible while charging.


CONNECTING

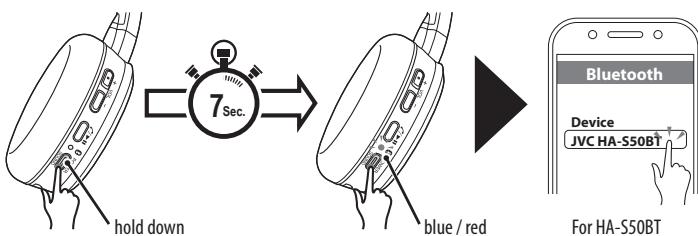

When the power is off, hold the POWER button down (for at least 7 seconds) until the indicator flashes alternately in red and blue.


Select "JVC HA-S50BT" ("JVC HA-S40BT", "JVC HA-S30BT") from the device list. The indicator flashes in blue when pairing is complete. During the pairing process, the other device may require input of a PIN code. In such a case, enter "0000" as the PIN code for the System.

MUSIC

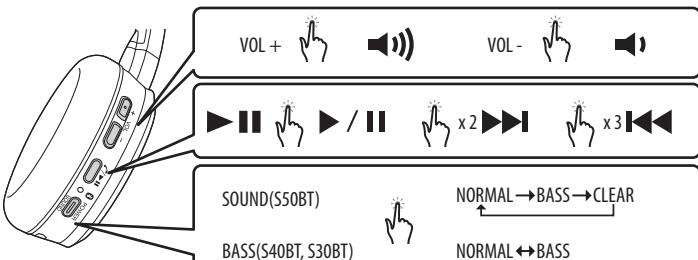


When you change the SOUND (BASS) mode, the unit beeps to indicate the current sound mode.
Beeps once: NORMAL / Beeps twice: BASS / Beeps 3 times: CLEAR

ON and OFF

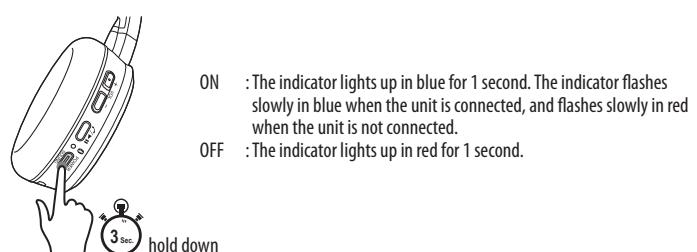

- If no BLUETOOTH device is connected for about 5 minutes, the System automatically turns itself off.
- When you turn on the unit for the first time after purchasing, the indicator flashes alternately in red and blue and pairing begins automatically.

PHONE

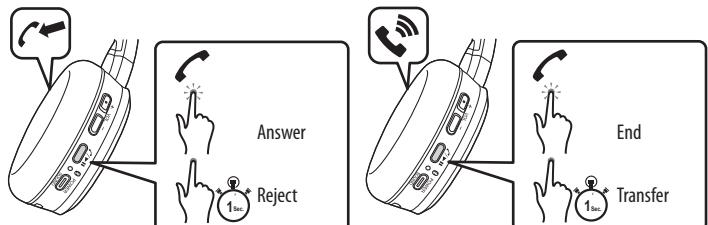

شكراً لك على شراء هذا المنتج من إنتاج JVC. قبل البدء في تشغيل هذه الوحدة، يرجى قراءة تعليمات التشغيل جيداً لضمان الاستمتاع بأفضل مستوى ممكناً للأداء. في حالة وجود أي أسئلة لديك، يرجى مراجعة موزع JVC.

تنبيه

لحماية ساعات الرأس، يرجى عدم...

- تعریضها للبلل.
- تحریکها بفقرة أو إسقاطها على أجسام صلبة.

احتیاطات الاستخدام

- يرجى عدم استخدام أي كابلات أخرى بخلاف الكابلات المرفقة.
- يرجى عدم استخدام كابل الشحن المرفق مع أي جهاز آخر.

• ستعتبر وسادات الأذن للتلف قبل الأجزاء الأخرى حتى في ظل ظروف الاستخدام أو التخزين الطبيعية نظراً لخصائص الصناعة التي تم تصنيعها منها.

• لا يستبدل وسادات الأذن، يرجى مراجعة الموزع الذي قدمت بشراء ساعات الرأس منه.

ملاحظة
إذا لم يعمل النظام على النحو الصحيح، فيرجى شحن النظام لإعادة ضبطه.

لتتجنب الإضرار المحتمل بحاسة السمع، يرجى عدم الاستئناع لمستويات صوت مرتفعة لفترات طويلة.



لتقليل مخاطر الصدمات الكهربائية، والحرائق، وما إلى ذلك.

- يرجى عدم فك البراغي، أو الغطاء أو المضور.

- يرجى عدم تعریض هذا الجهاز للأمطار أو الرطوبة.

- يرجى عدم تحكّم الوحدة أو تتعديلها.

• يرجى منع دخول المواد سريعة الاشتعال، أو المياه أو الأجسام المعدنية داخل الوحدة.

سلامتك...

في ظروف الطقس التي يكون فيها الهواء أكثر جفاناً مما يكون عليه الحال في الشتاء، ربما تشعر

بعض الصدمات الاستثنائية عند استخدام ساعات الرأس، بينما يشعر عليك التوقف عن استخدامها على الفور.

في حالة الابدأ في الشعور بالمرعش أثناء استخدام ساعات الرأس، ينصح عليك التوقف عن استخدامها على الفور.

- يرجى التأكد من عدم تعلق شعرك أو غير ذلك من الأشياء في مزلاجة طوق الرأس (زر الضبط) عند ضبط طوق الرأس.

تجنب استخدام ساعات الرأس...

في الأماكن المعرضة لمستويات الحرارة العالية أو الأذرعة الكثيفة

أو المنخفضة للغاية (أقل من ٤ درجة مئوية أو ٤٠ درجة فهرنهايت)

- يرجى عدم ترك ساعات الرأس...

• معروضة لأشعة الشمس المباشرة

• بالقرب من المداخن

المواصفات

BLUETOOTH

SBC	الحد الأقصى لمسافة الاتصال ١٠ م (٣٣ قدمًا) تقريباً	الحد الأقصى لمسافة الاتصال ٢ BLUETOOTH v٧٠،	قبسي
	برامج الترميز A٢DP/AVRCP/HSP/HFP	الأوضاع	
	+؛ دسيبل ملي واحد (حد أقصى)، فئة الفترة ٢	نطاق التردد ٢٤٠١ - ٢٤٨٠ جيجاهرتز	قدرة الخرج

يتم ضبط إعدادات EUT من خلال البرنامج بالطريقة التالية:

(تردد الراديو): قدرة GFSK: ٣٣، قدرة EDR: ٢٧ RF


البرنامج: AB١٥٠٠ G Family Configuration Tool ٢٥،٥٢٠،٠٠ تتمثل علامة كلمة Bluetooth® وشعارها علامات تجارية مملوكة لشركة Bluetooth SIG, Inc, Inc. وأي التجارية الأخرى المملوكة لصاحبيها.

المواصفات

بطارية الليثيوم الداخلية القابلة للشحن مصدر الإمداد بالطاقة
استجابة التردد ٢٠ هرتز - ٢٠٠٠ هرتز
العمر التشغيلي للبطارية ١٧ ساعة تقريباً (وفقاً لظروف الاستخدام).
مدة الشحن ٣ ساعات تقريباً
نطاق درجة الحرارة المناسب للاستخدام ٥ درجات مئوية (٤١ درجة فهرنهايت) إلى ٤٠ درجة مئوية (١٠٤ درجة فهرنهايت)
الوزن ١٤٥ جراماً (٥،١١٪ أونصة)، S50BT: ١٤٦ جراماً (٥،٤٠٪ أونصة) (بما في ذلك البطارية الداخلية القابلة للشحن)
الملحقات كابل الشحن

تحضير التصميمات والمواصفات للتغيير دون اخطار.


الشحن

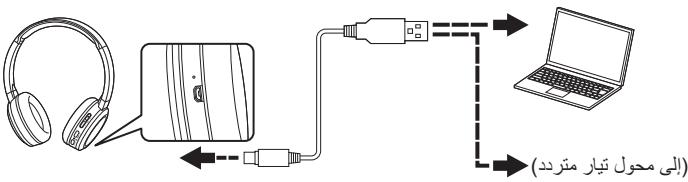


يُضيء المؤشر باللون الأحمر، ويبدأ الشحن. عند اكتمال الشحن، ينطفئ المؤشر.

- عند انخفاض مقدار الشحن المتبقى بالبطارية، ويومض المؤشر باللون الأحمر ببطء وبصدر صوت إنذار كل ٤ دقائق.
- لا يكون التشغيل ممكناً أثناء الشحن.

الأجزاء (الجانب الأيمن)

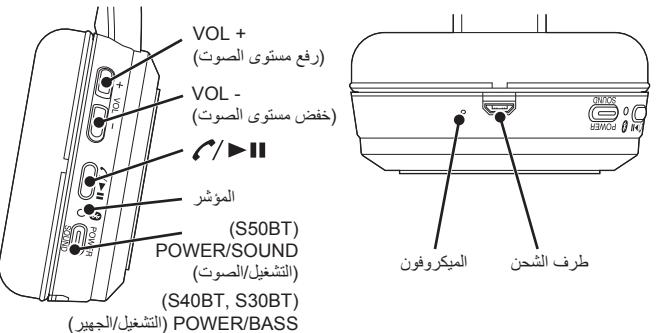


التوصيل

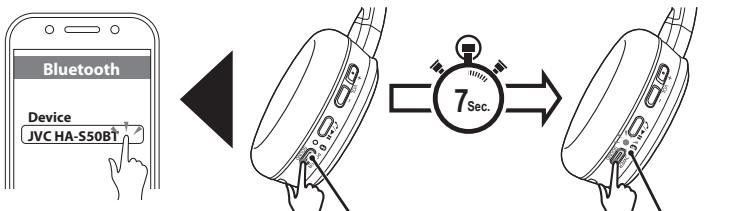

عندما تكون الوحدة في وضع إيقاف التشغيل، اضغط مع الاستمرار على زر POWER (التشغيل) (لمدة لا تقل عن ٧ ثوانٍ حتى يومض المؤشر باللون الأحمر والأزرق بالتناوب).

حدد "JVC HA-S٣٠BT", "JVC HA-S٤٠BT", "JVC HA-S٥٠BT" (JVC HA-S٣٠BT) من قائمة الأجهزة. يومض المؤشر باللون الأحمر عند اكتمال عملية الإقران. أثناء عملية الإقران، ربما يطلب الجهاز الآخر إدخال رمز PIN. في تلك الحالة، قم بإدخال "****" كرمز PIN للنظام.

MUSIC (الموسيقى)

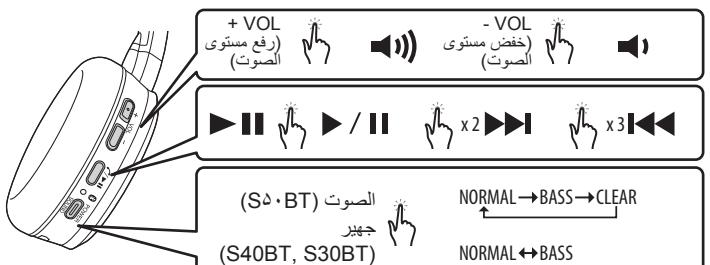

عند قيامك بتغيير وضع الصوت (جهير)، ستقوم الوحدة بإصدار صوت صفارة للإشارة إلى وضع الصوت الحالي.

PHONE (الهاتف)

